



The NJR-T04HD (encoder)/NJR-R04HD (decoder) is a 4-port HDMI AV over IP device with built-in scan converter. This extender transmits 4-channel HDMI signal over one duplex fiber cable, and it supports RS-232C bidirectional communication and LAN transmission. The NJR-T04HD/NJR-R04HD can be used as a 4-input and 4-output matrix switcher or splitter. One NJR-R04HD can configure videowall with 4 or fewer displays and multiple NJR-R04HDs enable videowall with larger number of displays using the sync function.

The NJR-T04HD/NJR-R04HD can be used with other IP-NINJAR products. For example, if the NJR-R01UHD is connected to the NJR-T04HD, 4 full HD video signals that are input to the NJR-T04HD can be displayed as a 4K@60 video signal in a sink device. If the NJR-T01UHD is connected to the NJR-R04HD, a 4K@60 video signal that is input to the NJR-T01UHD can be divided and displayed in four sink devices. (In case the 4K video is protected by HDCP 2.2, the NJR-R04HD cannot display video signals.)

Please use this product with a combination of IP-NINJAR series encoders and decoders. It cannot be connected to OPF series products or FDX.

■ Specification

Item		NJR-T04HD (Encoder)	NJR-R04HD (Decoder)
Input		4 inputs HDMI (*1)/DVI 1.0 TMDS single link HDCP 1.4 Automatic input signal equalization EDID emulation Connector: Female, HDMI Type A (19-pin)	1 input Digital optical signal for extension Format: IP-NINJAR protocol RS-232C/LAN Connector: 2 LCs
	Output	1 output Digital optical signal for extension Format: IP-NINJAR protocol RS-232C/LAN Connector: 2 LCs	4 outputs HDMI (*1)/DVI 1.0 TMDS single link HDCP 1.4 Automatic input signal equalization Connector: Female, HDMI Type A (19-pin)
Format		VGA / SVGA / XGA / WXGA (1280x768) / WXGA (1280x800) / Quad-VGA / SXGA / WXGA (1360x768) / WXGA (1366x768) / SXGA+ / WXGA+ / WXGA++ / UXGA / WSXGA+ / VESAHD / WUXGA / QWXGA (*2) For WUXGA / QWXGA, only Reduced Blanking is supported. 480i / 480p / 576i / 576p / 720p / 1080i / 1080p	VGA / SVGA / XGA / WXGA (1280x768) / WXGA (1280x800) / Quad-VGA / SXGA / WXGA (1360x768) / WXGA (1366x768) / SXGA+ / WXGA+ / WXGA++ / UXGA / WSXGA+ / VESAHD / WUXGA / QWXGA (*2) For WUXGA / QWXGA, only Reduced Blanking is supported. 480i / 480p / 576i / 576p / 720p / 1080i / 1080p (*3) / 4K (3840 x 2160) / 4K (4096 x 2160) (*4)
	Color depth	24 bit, 30 bit Deep Color (*5)	
	Dot clock	25 MHz to 165 MHz	
	TMDS clock	25 MHz to 225 MHz	
	TMDS data rate	0.75 Gbps to 6.75 Gbps	
	Digital audio input/output	Multi-channel LPCM up to 8 channels (*6) Sampling frequency: 32 kHz to 192 kHz, Sample size: 16 bit to 24 bit	
	Lip Sync delay	-	Max. 160 ms.
	External sync. I/O	-	1 input and output (SYNC, CLK) Level: TTL Connector: BNC For sync between IDK's NJR-R04HD only.
HDMI cable for transmission distances		Up to 98 ft. (30 m) (*7)	Up to 164 ft. (50 m) (*7)
Cable for extension	Cable	Duplex fiber cable SFP+ optical transceiver	
	Polishing (*8)	SFP+ optical transceiver for Multimode : PC polishing (Recommended) SFP+ optical transceiver for Singlemode: UPC polishing (Recommended), SPC *APC is not supported	
	Transmission distances (*9)	Multimode fiber (OM3): Up to 984 ft. (300 m) Singlemode fiber (OS1): Up to 6.21 mi. (10 km) Singlemode fiber (OS1): Up to 24.85 mi. (40 km, optional)	
Control	RS-232C	1 port/male D-sub (9-pin), full duplex, up to 115.2 kbps	
	LAN	1 port/RJ-45 10Base-T/100Base-TX/1000Base-T (Auto Negotiation), Auto MDI/MDI-X	
Functions	Scan conversion	Motion adaptive interlaced/progressive conversion, Aspect Ratio Control	
	Others	Matrix switching, DDC buffer	Matrix switching, Lip Sync, DDC buffer, Connection Reset (*10)
General	AC adapter	Input : 100 - 240 VAC \pm 10%, 50 Hz/60 Hz \pm 3 Hz Output : DC 12 V 5 A (A dedicated AC adapter is provided)	
	Power consumption	About 35 Watts	About 39 Watts
	Dimensions	8.3 (W) \times 1.7 (H) \times 9.8 (D)" (210 (W) \times 44 (H) \times 250 (D) mm) (Half rack wide, 1U high) (Excluding connectors and the like)	
	Weight	4.2lbs. (1.9 kg)	4.2lbs. (1.9 kg)
	Temperature	Operating: 32°F to 104°F (0°C to +40°C) Storage : -4°F to +176°F (-20°C to +80°C)	
	Humidity	Operating/Storage: 20% to 90% (Non Condensing)	

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●Blu-ray Disc and Blu-ray are trademarks of Blu-ray Disc Association. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●Connection Reset and IP-NINJAR are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified.

- *1 x.v.Color, 3D, ARC, HEC, and CEC are not supported.
- *2 The NJR-T04 input does not support UXGA / WUXGA / QWXGA if all the following conditions are met:
 - An NJR-T01UHD or NJR-R01UHD is included in the system.
 - 4K video that is combined video from four full HD output channels of NJR-T04HD combined video and input to the NJR-T04HD is transmitted.
 - The video combination mode of the NJR-T04HD is set to four-window mode (default).
- *3 If only the NJR-T04 and NJR-R04HD are used in the system, the same video format may be output from the NJR-R04HD. Refer to the User Guide for details
- *4 Only CEA-861 timing is supported for 4K input video.
- *5 30 bit/pixel (10 bit/component) Deep Color is supported only for 1-channel transmission.
- *6 8-channel audio is supported when only 1 audio input channel is transmitted.
- *7 The value of the maximum transmission distance was obtained when IDK's cable (24 AWG) was used and 1080p@60 24 bit/pixel (8 bit/component) signals were transmitted. The maximum transmission distance depends on the connected devices. The distance may not be extended with some device combinations, cabling method, or other manufacturer's cable. Video may be disturbed or may not be output even if signals are within the range mentioned above.
- *8 It is possible to connect without using the recommended polishing method, but that may cause a change of transmission distance ability due to an increase in return loss.
- *9 The maximum transmission distance is measured under the following conditions: Fiber that is polished by a recommended method is used, there is no interconnection, and the allowable bending radius is not exceeded.
- *10 For digital systems, some problems, such as an HDCP authentication error, can often be recovered by physically disconnecting and reconnecting the digital cables. However, the Connection Reset feature will fix these problems automatically without the need to physically plug and unplug the cables. It creates the same condition as if the cable were physically disconnected and reconnected. This feature only works for the NJR's output. If other devices are connected between the NJR's output and sink device, this feature may be invalid.



■ SFP+ optical transceiver

Item	10G-MM-SFP	10G-SM-SFP	10G-SM40-SFP (Optional)
Fiber	Multimode fiber	Singlemode fiber	Singlemode fiber
Wave length	850 nm (VCSEL Laser*)	1310 nm (DFB laser*)	1550 nm (EML laser*)
Max. transmission distance	OM3: 984 ft. (300 m)	OS1: 6.21 mi. (10 km)	OS1: 24.85 mi. (40 km)
Receiver sensitivity (OMA) @10.3Gbps	-11.1 dBm or higher	-12.6 dBm or higher	-16 dBm or higher
Average Launch Power	-5 dBm to -1 dBm	-8.2 dBm to +0.5 dBm	-1 dBm to +2 dBm
Max. input power	+0.5 dBm	+0.5 dBm	-1 dBm
Connector	LC (Duplex)		



*The lasers in these models meet class1.

■ Front and Rear Panels

NJR-T04HD-MM
 NJR-T04HD-SM

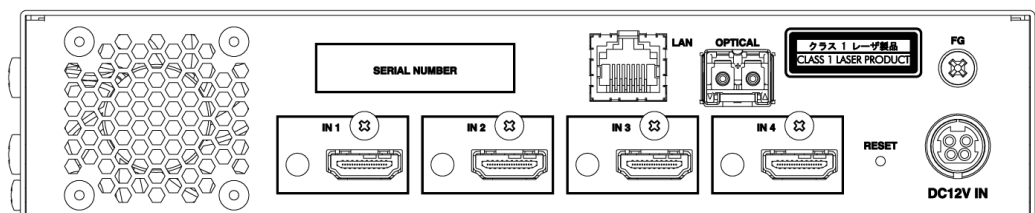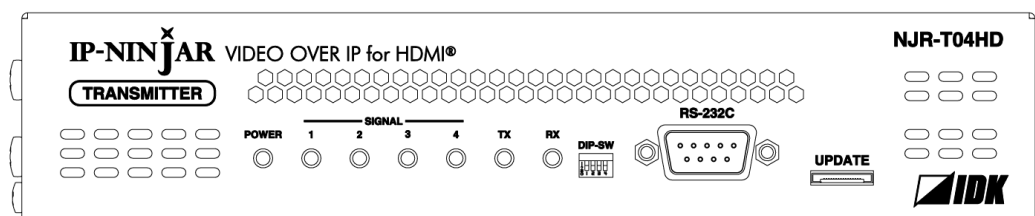


NJR-R04HD-MM
 NJR-R04HD-SM

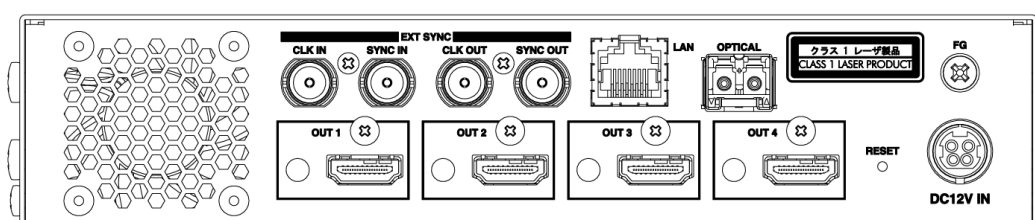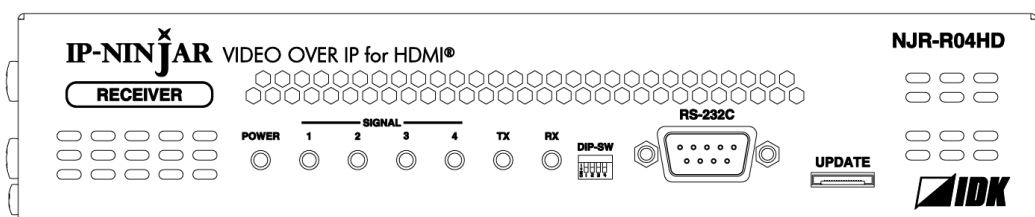

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●Blu-ray Disc and Blu-ray are trademarks of Blu-ray Disc Association. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●Connection Reset and IP-NINJAR are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified.

4-channel AV over IP Encoder/Decoder for HDMI
NJR-T04HD/NJR-R04HD


■ Diagram

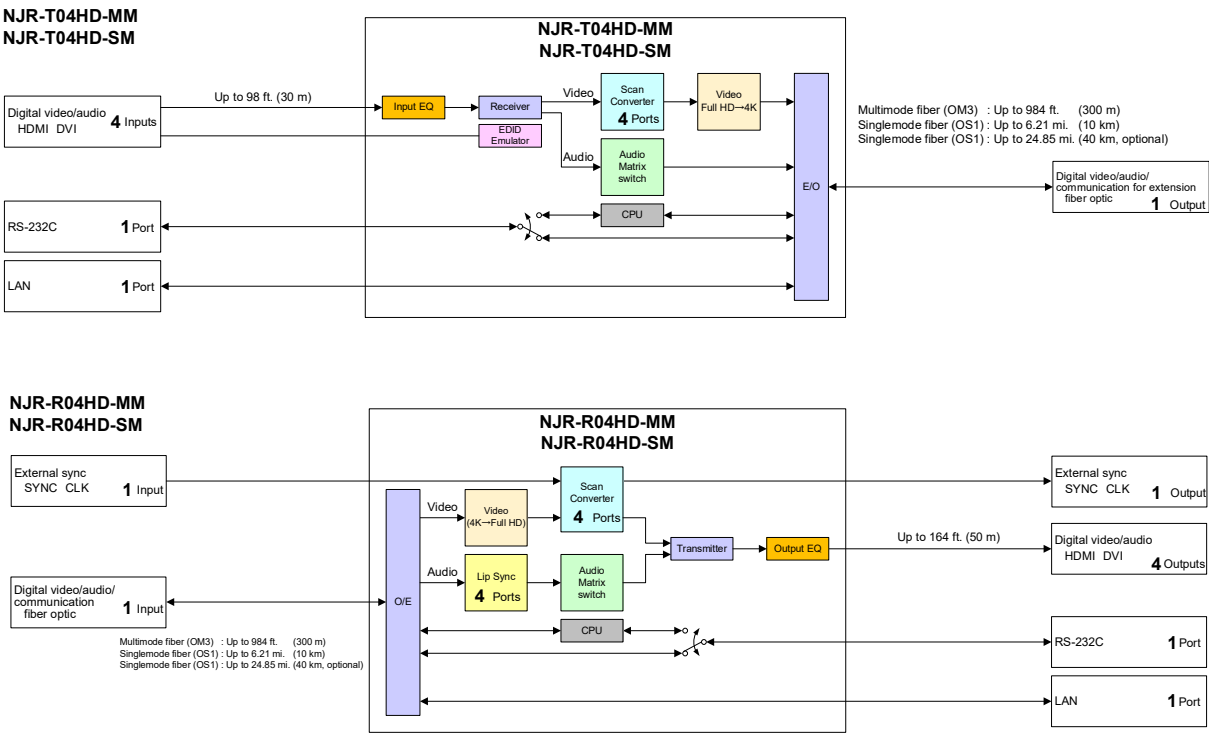


●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●Blu-ray Disc and Blu-ray are trademarks of Blu-ray Disc Association. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●Connection Reset and IP-NINJAR are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.

■ Application examples

<Used as network extender>

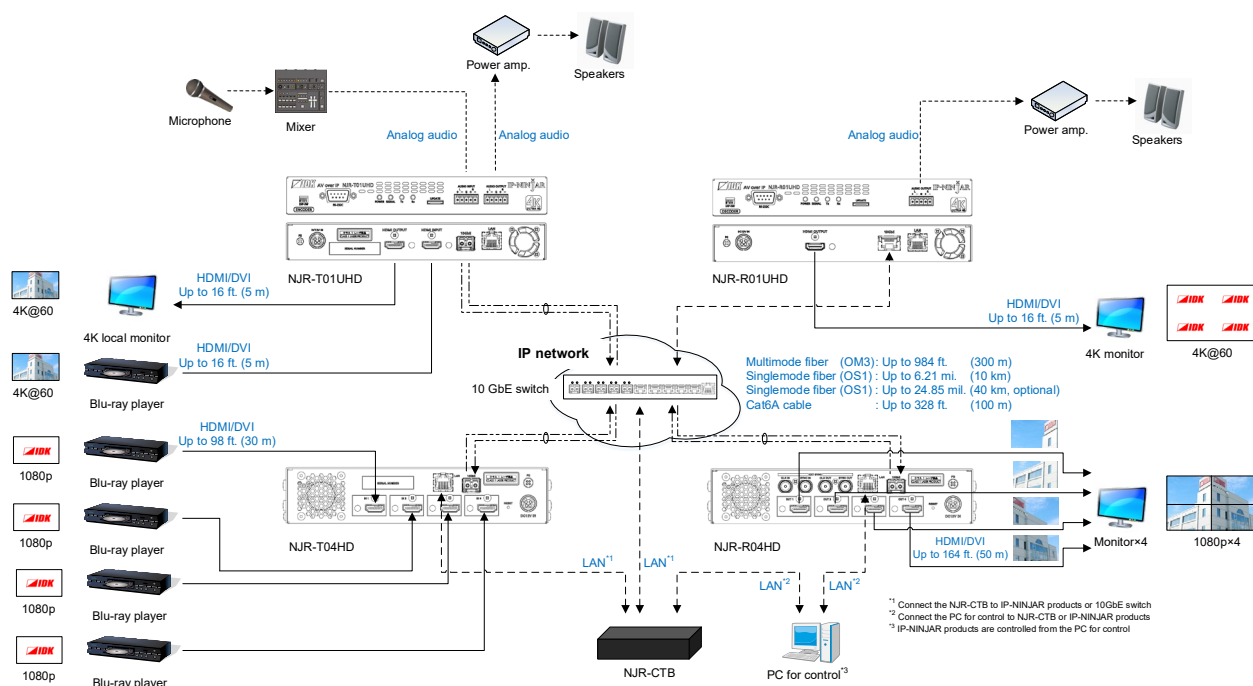

<Used as extender>

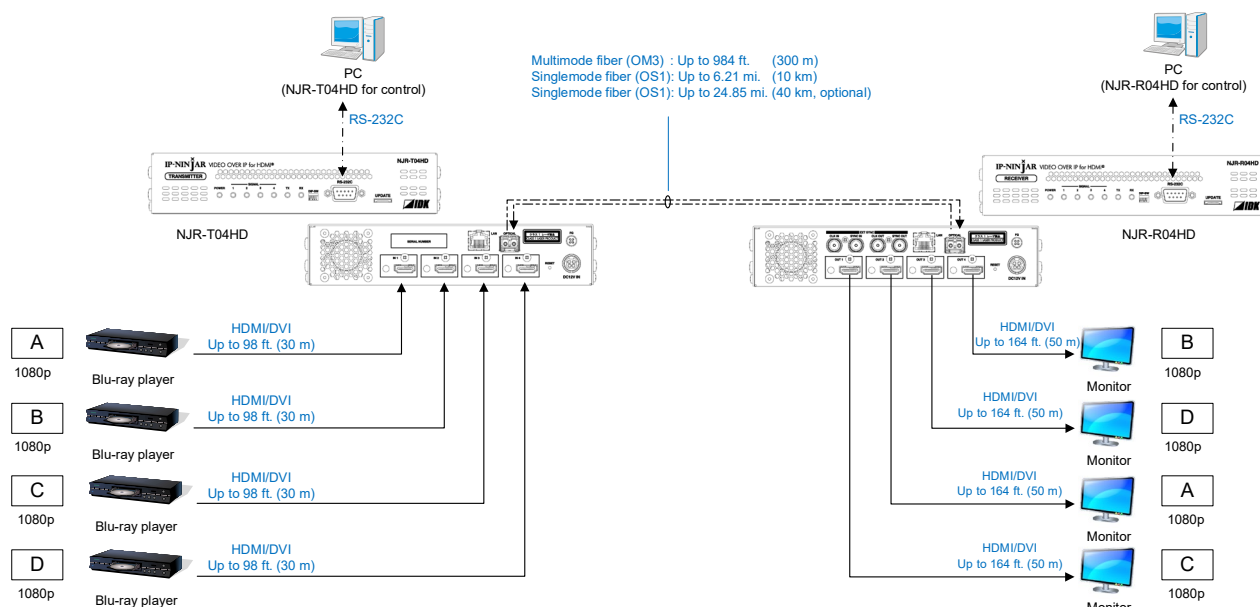

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●Blu-ray Disc and Blu-ray are trademarks of Blu-ray Disc Association. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●Connection Reset and IP-NINJAR are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.

■ Models

Model		Type	Model number
Fiber optic	No SFP+ optical transceiver	Encoder	NJR-T04HD
		Decoder	NJR-R04HD
	Multimode fiber	Encoder	NJR-T04HD-MM
		Decoder	NJR-R04HD-MM
	Singlemode fiber	Encoder	NJR-T04HD-SM
		Decoder	NJR-R04HD-SM

[Features]

■ Video

- Up to 1080p/QWXGA (Reduced Blanking)
- HDCP 1.4
- Automatic input signal equalization
 - Input : Up to 98 ft. (30 m) (NJR-T04HD)
 - Output : Up to 164 ft. (50 m) (NJR-R04HD)
- Motion adaptive interlaced/progressive conversion
- Matrix switching
- Output up to four sink devices from an NJR-R04HD
- Scan conversion
- Aspect ratio control
- External sync I/O for videowall
- Transmission distances
 - Multimode fiber (OM3) : Up to 984 ft. (300 m)
 - Singlemode fiber (OS1) : Up to 6.21 mi. (10 km), (Up to 24.85 mi. (40 km, optional))

■ Audio

- Lip Sync (NJR-R04HD)

■ Communication

- Bidirectional RS-232C
- LAN

■ Network

- 10 Gb switch allows: extension, distribution, matrix switching, videowall, and multiview
- Controllable through network using NJR-CTB
- IP-NINJAR encoders and decoders can easily be added and replaced

■ Others

- EDID emulation
- DDC buffer
- Connection Reset
- AC adapter with locking mechanism

●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●Blu-ray Disc and Blu-ray are trademarks of Blu-ray Disc Association. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●Connection Reset and IP-NINJAR are registered trademarks of IDK Corporation in Japan. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the “®” or “™” marks may not be specified.