



Sound Control Technologies

RCU2S-B10™ USB Application Guide

Updated: 04/21/2023

The RCU2S-B10™ supports multiple camera models:

- Angekis Saber Plus
- AVer DL30 • DL50 • MD330u/MD330UI
- AVer TR311HWV2 • AVer TR313V2 • AVer TR323NV2
- AVer TR333NV2 • AVer TR530+ • AVer VB342 Pro
- AVer PTC500+
- ClearOne Unite 150 & 200

- Lumens VC-B30U
- Marshall CV610-U3
- Minnray UV950A
- MaxHub UC P20
- PTZOptics 12XUSB & 20XUSB
- Huddlecam HC10X, HC20X & HC30X

- Sony SRG-120U & SRG-XP1
- Vaddio ConferenceShot FX
- Vaddio ConferenceShot 10
- VDO360 Saber20X & VDO360 CompassX
- VHD V20C, VX110, VX710N, VX710L & VX120
- Yamaha CS-700AV



Shown:
ClearOne Unite 200

3.5mm Audio Cable
Integrator-Supplied

PPC-023-0.3M
RJ11 (RCU2S-CE™)
to EIAJ-4 Barrel

RCC-M004-0.3M
USB-A (RCU2S-CE™)
to USB-B



RCU2S-CE™

RCU2S-HE™ Front Panel

Field-Upgradeable microSD Slot

RCC-M004-1.0M
USB-B (RCU2S-HE™)
to USB-A



Laptop



RCU2S-HE™


SCTLINK™ Cable
Power, Control & Video

The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply

SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
T568A or T568B (100m Max Length)

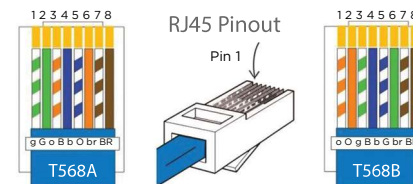

Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)