



# Sound Control Technologies

## RCU2S-BA8™ USB Application Guide

Updated: 12/15/2022

The **RCU2S-BA8™** supports multiple camera models:

- Angekis Saber Plus
- AVer TR311HWV2
- AVer TR313V2
- AVer TR323NV2
- AVer TR333NV2
- ClearOne Unite 150
- ClearOne Unite 200
- Huddlecam HC10X-GY
- Huddlecam HC20X-GY/WH

Shown: **ClearOne Unite 200**

- Huddlecam HC20X
- Huddlecam HC30X
- Lumens VC-B30U
- Marshall CV610-UB

- Minnray UV950A
- PTZ Optics 12X USB
- PTZ Optics 20X USB
- Sony SRG-120DU

- VDO360 Saber20X NDI
- VDO360 CompassX
- VHD V71U2
- VHD V20C

- VHD VX110
- VHD VX710N
- VHD VX701L
- VHD VX120



**3.5mm Audio Cable**  
Integrator-Supplied

**RCC-C005-0.3M**  
RJ45 (RCU2S-CE™) Y Cable  
to 4mm Power Barrel  
to 8 Pin Mini Din

**RCC-C006-0.4M\***  
RJ11 (RCU2S-CE™) to 8 Pin Mini Din  
*\*Purchased Separately:  
Cable required for VISCA Loop or  
Daisy Chain Functionality*

**RCC-M004-0.3M**  
USB-A (RCU2S-CE™)  
to USB-B




### Module Dimensions

**RCU2S-CE™:** H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

**RCU2S-HE™:** H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

**RCU2S-HE™ Front Panel**  
Field-Upgradeable microSD Slot

**RCC-M004-1.0M**  
USB-B (RCU2S-HE™)  
to USB-A

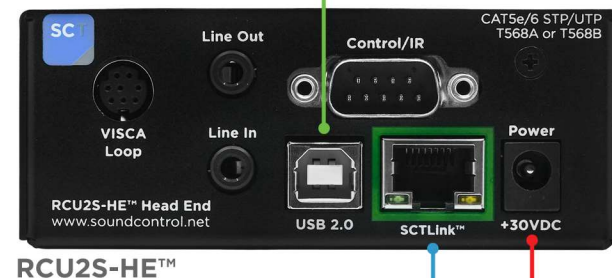

**SCTLink™ Cable**  
Power, Control & Video

The **SCTLink™** cable must always be  
a single, point-to-point CAT cable with  
no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply

### SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

