



The **RCU2S-B20™** supports multiple camera models:

- 1Beyond AutoFinder & AutoFramer
- AVer VB130
- AVer Cam 520 Pro & Pro 2
- AVer Cam 520 Pro Advanced
- AVer Cam 550
- Huddlecam HC12X-HUDDLEVIEW
- Huddlecam SIMPLTRACK LITE
- Huddlecam HC20X-SIMPLTRACK2 (*shown*)

### RCU2S-HE™ Front Panel

Field-Upgradeable microSD Slot

### RCC-M004-1.0M

USB-B (RCU2S-HE™) to USB-A




Laptop

**3.5mm Audio Cable**  
Integrator-Supplied

**RCC-M004-0.3M**  
USB-A (RCU2S-CE™) to USB-B

**PPC-022-0.3M**  
RJ11 (RCU2S-CE™) to 5.5mm x 2.1mm Barrel

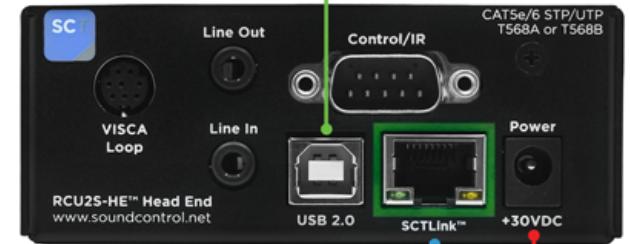

RCU2S-HE™

### SCTLINK™ Cable

Power, Control & Video

The **SCTLINK™** cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

**WPS-12 30VDC**  
100-240V 47-63Hz  
Power Supply



RCU2S-CE™

### Module Dimensions

RCU2S-CE™: H: 0.789" (20mm) x W: 2.264" (57mm) x D: 3.725" (94mm)

RCU2S-HE™: H: 1.448" (36mm) x W: 3.814" (96mm) x D: 3.578" (90mm)

### SCTLINK™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable  
T568A or T568B (100m Max Length)

