Sound Control Technologies

RemoteTableKit-Mini™ RTK-MINI-X30™ Application Guide

Updated: 07/17/2023

Poly Studio X30

RCC-M005-1.0M
USB-A (RTK-MINI-RX™)
to USB-C

RCC-H016-1.0M
RJ45 UTP Control Cable

RCC-H001-1.0M
HDMI Video Cable

Can be used on Tx or Rx.
WPS-12 30VDC
100-240V 47-63Hz
Power Supply

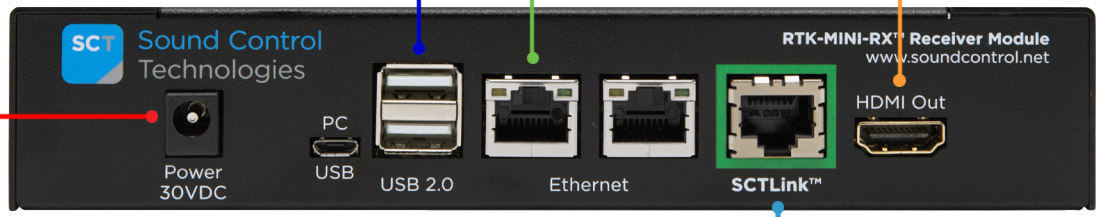

RTK-MINI-RX™
Receiver Module

SCTLink™ Cable
Ethernet/POE | HDMI | USB

The SCTLink™ cable must always be a single, point-to-point CAT cable with no couplers or interconnections.

Poly TC8
Poly Provided

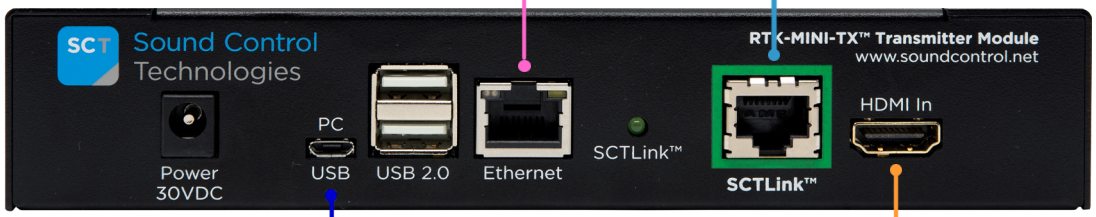

RTK-MINI-TX™
Transmitter Module

Laptop

RCC-M006-2.0M
USB Micro B (RTK-MINI-TX™) to USB-A

RCC-H001-2.0M
HDMI Video Cable

SCTLink™ Cable Specs
Integrator-Supplied CAT6 STP/UTP Cable
T568A or T568B (10m-100m min/max Length)

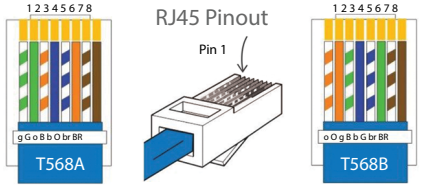

Module Dimensions
RTK-MINI-TX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)
RTK-MINI-RX™: H: 1.394" (35mm) x W: 7.283" (185mm) x D: 4.484" (114mm)